

# Bradley

AUSTRALIA

customised excellence

[www.bradleyaustralia.com](http://www.bradleyaustralia.com)

## MODEL 2742

### RECESSED TOUCHLESS HAND DRYER

#### Options:

2742-10 : Semi Recessed

2742-11 : Surface Mounted



#### PRODUCT FEATURES:

- Satin Stainless Steel Finish ( Custom finishes available)
- Intelligent sensor
- Recessed
- 20V, 200W, 3.6A
- Ideal for mid to high volume public washrooms

Overall Dimensions

Refer to drawings

#### PRODUCT DATA:

##### CONSTRUCTION:

Manufactured of type 304 stainless steel

Motor: Brushless high efficiency with low power consumption

##### ELECTRICAL SPECIFICATIONS:

|                      |                     |
|----------------------|---------------------|
| ELECTRICAL SUPPLY:   | 240V / 50Hz / 3.6A  |
| RATED POWER:         | 800W                |
| AIR VOLUME:          | 75m <sup>3</sup> /h |
| AIR VELOCITY:        | 85m/sec             |
| NOISE LEVEL:         | >70db               |
| NET WEIGHT:          | 3.3kg               |
| PROTECTION CATEGORY: | IP 22               |

##### RECOMMENDED INSTALLATION HEIGHT:

|                                  |        |
|----------------------------------|--------|
| Men's Washroom                   | 1200mm |
| Women's Washroom                 | 1150mm |
| Children's Washroom (ages 11-15) | 1110mm |
| Children's Washroom (ages 5-10)  | 850mm  |
| Accessible Bathroom              | 1000mm |

##### OPERATION:


Activation by infra-red (touch free) sensor. The intelligent sensor alters the temperature of the output airflow to suit the installation environment. This is an adjustable feature to be amended by a certified electrician. Round nozzle for concentrated air flow and quick drying process. Automatically adjusts heating power for energy conservation.





##### INSTALLATION:

Recessed unit requires Rough Wall Opening 185mm W x 600mm H x  
Secure to framing with mounting screws at holes provided.

##### GUIDE SPECIFICATION:

Recessed automatic hand dryer shall be fabricated of type 304 stainless steel, 2mm thick, featuring vandal-resistant key and concealed nozzle. Motor long-life energy saver. Low noise, high air flow speed. 10 to 15 seconds drying time.

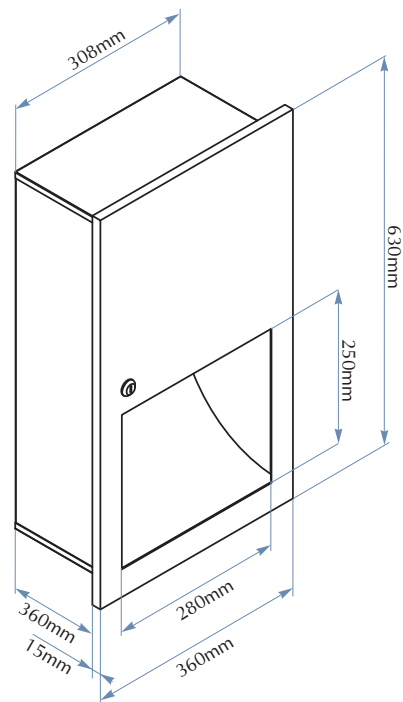

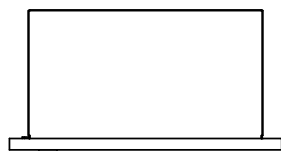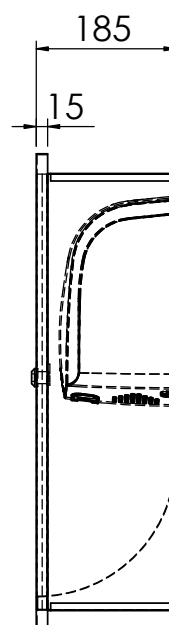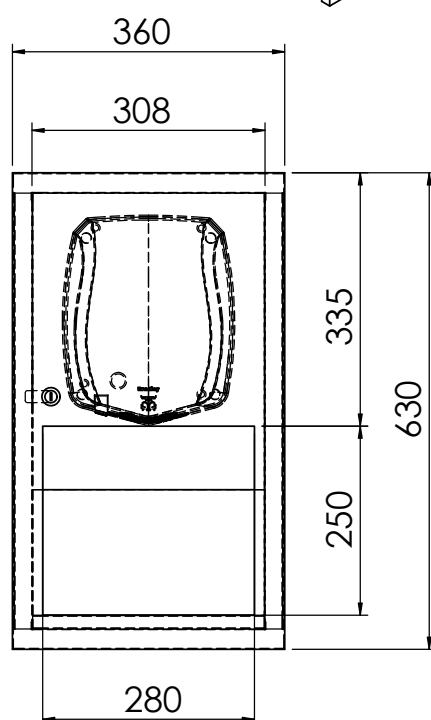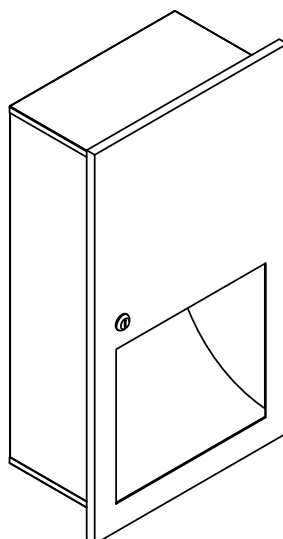

**Bradley**  
AUSTRALIA  
customised excellence

DWG NO.

2742

APPROVED BY:

Proudly customised design please approve

SCALE:1:10