

# Bradley

## MODEL 832-005-BN

### RIGHT HAND GRAB RAIL

#### Options:

832-006-BN Left Hand

-2 Peened (Safety Grip)

-4 Mirror Polished

-6 Powdercoated

-MB Matt Black Option Also Available

#### PRODUCT FEATURES:

- Surface mounted
- 32mm diameter
- Concealed fixing
- All dimensions centre to centre
- Standard - 950mm x 600mm at 90° (under slung)
- Complies with AS1428.1
- Matte black option also available
- For special sizes nominate:  
Horizontal (A) =  
Vertical (B) =

#### PRODUCT DATA:

##### CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 80mm dia.

13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural brushed nickel finish. Snap over flanges to conceal mounting screws.

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D.

18 gauge stainless steel, seamless construction with exposed surfaces in architectural brushed nickel finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab rail. All welds ground and polished to blend. Mandrel bending process maintains uniform rail diameter.

##### STRENGTH:




When properly mounted, all Bradley heavy duty grab rail systems meet or exceed the requirements of Australian Standard AS1428.1 (2,3), of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).

##### INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use rail as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.

##### GUIDE SPECIFICATION:




Grab rail shall be fabricated of type 304 brushed nickel finish stainless steel with concealed mounting flanges in sizes and configurations as indicated.

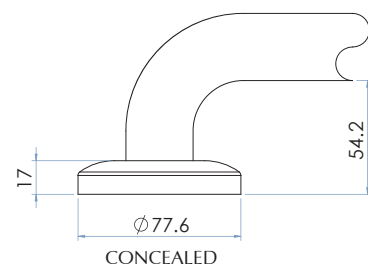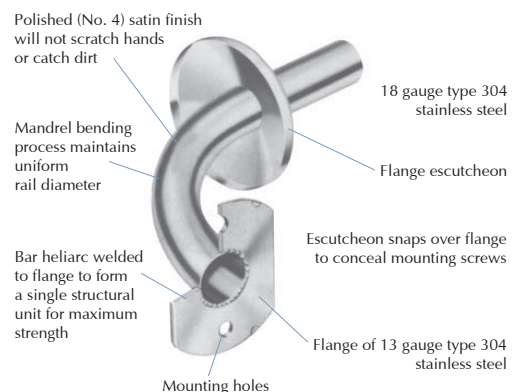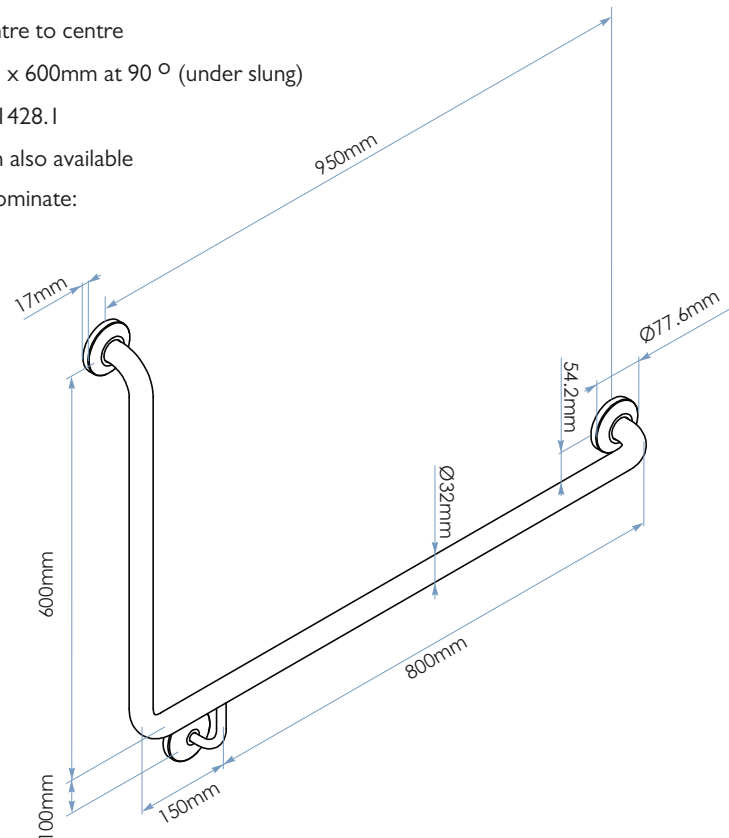

\*50-60mm wall clearance required under most building design codes

1300 364 561

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation.

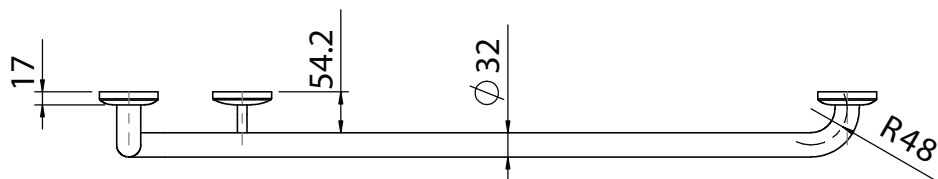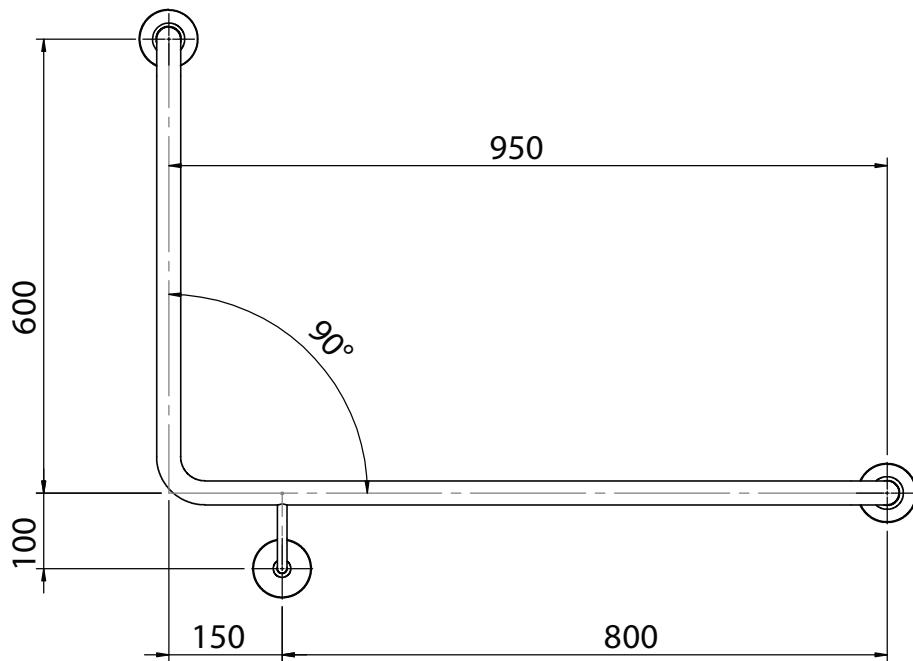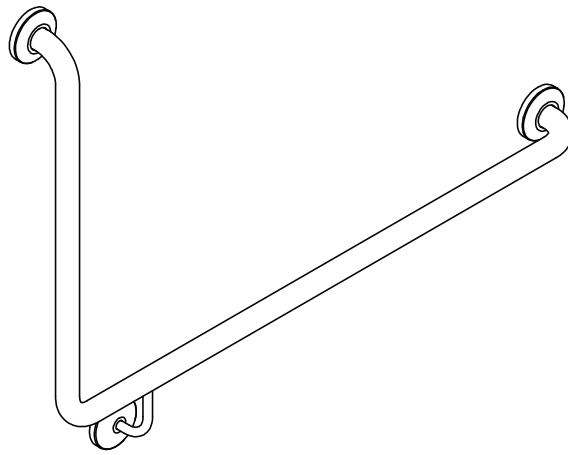

**Bradley**

DWG NO. 832-005-BN

APPROVED BY:

Proudly customised design please approve SCALE: 1:10