

MODEL 8916

WRAPAROUND GRAB RAIL SET WITH INTEGRATED BACKREST - LEFT HAND

Options:

- 8915 Right hand combination
- 2 Peened (Safety Grip)
- 4 Polished
- 6 Powdercoated
- 51 with Toilet Roll Holder



PRODUCT FEATURES:

- Meets the requirements of AS1428.1-2009
- 32mm dia satin finish stainless steel
- Concealed fixing
- All dimensions centre to centre
- Backrest: white polyurethane 40mm thick

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 80mm dia. 13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel.

One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D.

18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab bar.

All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter.

BACKREST: Fabricated of 40mm thick white polyurethane.

STRENGTH:

When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of Australian Standard AS1428.1 (2,3), of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).



INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use bar as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.

GUIDE SPECIFICATION:

Grab bar shall be fabricated of type 304 satin finish stainless steel with concealed mounting flanges - incorporating integrated backrest - in sizes and configurations as indicated on the drawings on page 2.

Refer Page 2 for drawings

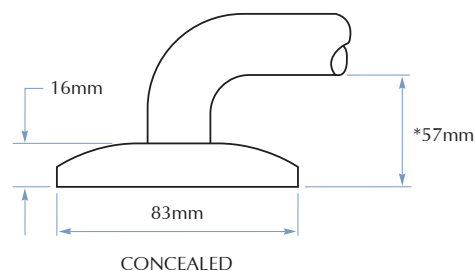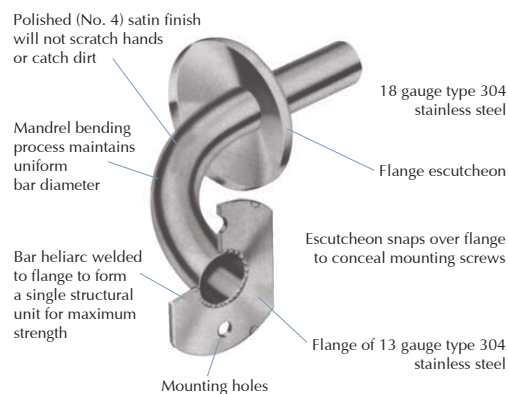

*50-60mm wall clearance required under most building design codes

MODEL 8916

WRAPAROUND GRAB RAIL SET WITH INTEGRATED BACKREST - LEFT HAND

Options:

- 8915 Right hand combination
- 2 Peened (Safety Grip)
- 4 Polished
- 6 Powdercoated
- 51 with Toilet Roll Holder

PAGE 2

