

MODEL 8AUS-001

AUSTRALIAN MANUFACTURED GRAB RAIL

Options:

- 2 Peened (Safety Grip)
- 6 Powdercoated



PRODUCT FEATURES:

- Surface mounted
- 32mm diameter
- Smooth concealed fixing cover
- All dimensions centre to centre
- AS 1428.1 Compliant
- Custom sizing available

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 80mm dia. 13 gauge stainless steel.

ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel.

One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

TUBING: Fabricated of type 304 (18-8), 32mm (1-1/4") O.D.

18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the grab rail. All welds ground and polished to blend. Mandrel bending process maintains uniform rail diameter. Australian Manufactured.

STRENGTH:

When properly mounted, all Bradley heavy duty grab rail systems meet or exceed the requirements of Australian Standard AS 1428.1

INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use rail as template to locate mounting holes. Drill holes and set anchors as appropriate. Mount grab rail and secure mounting screws. Snap escutcheons into place.



GUIDE SPECIFICATION:

Grab rail shall be fabricated of type 304 satin finish stainless steel with concealed mounting flanges in sizes and configurations as indicated.

Australian Manufactured.

Available Lengths:

300mm:	8AUS-001-12
400mm:	8AUS-001-16
450mm:	8AUS-001-18
500mm:	8AUS-001-20
600mm:	8AUS-001-24
750mm:	8AUS-001-30
800mm:	8AUS-001-32
900mm:	8AUS-001-36
1000mm:	8AUS-001-40
1200mm:	8AUS-001-48
1500mm:	8AUS-001-60

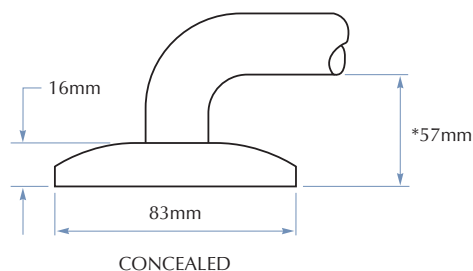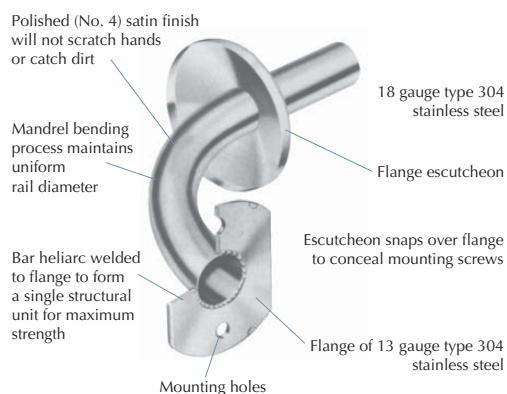

*50-60mm wall clearance required under most building design codes