

Bradley

AUSTRALIA

customised excellence

www.bradleyaustralia.com

MODELS 9538 and 9539

Options:

9538-4 Bright Polished Finish

9539-4 Bright Polished Finish

SHOWER CURTAIN ROD WITH CONCEALED FIXING 9538



PRODUCT FEATURES:

- Satin finish stainless steel - 25mm dia
- Concealed surface mounting
- Optional shower curtain available: Model 9537

Overall Dimensions: Please specify length required.



Optional Shower Curtain:

9537 - 1800mm Wide x 1800mm High

SHOWER CURTAIN ROD WITH CONCEALED FIXING 9539



PRODUCT FEATURES:

- Satin finish stainless steel - 31.8mm dia
- Concealed surface mounting
- Optional shower curtain available: Model 9537

Overall Dimensions: Please specify length required.

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 22 gauge stainless steel, 79.4mm dia. Shower rod support sleeves formed with flange as one piece.

TUBING: Fabricated of type 304 (18-8), 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish.



ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

INSTALLATION:

To properly engage rod in support sleeves, rod length must be no less than approximately 6mm shorter than wall opening. Secure one flange to wall with mounting screws (included) at holes provided. Align mounting holes vertically. Slip opposite flange and both escutcheons into place. Secure flange to wall and snap escutcheons over mounting flanges.

GUIDE SPECIFICATION:

Concealed mounted shower rod shall be fabricated of type 304 (18-8), 18 gauge stainless steel of seamless construction. Mounting flanges shall be of type 304 (18-8), 22 gauge stainless steel with snap-on vandal-resistant protective escutcheons.

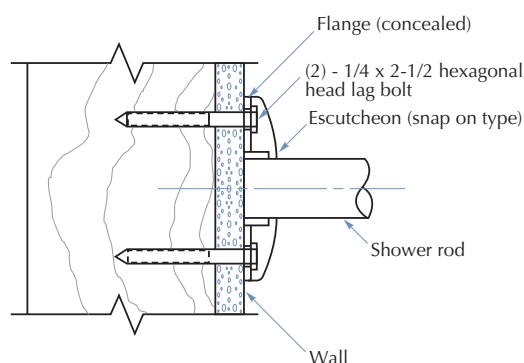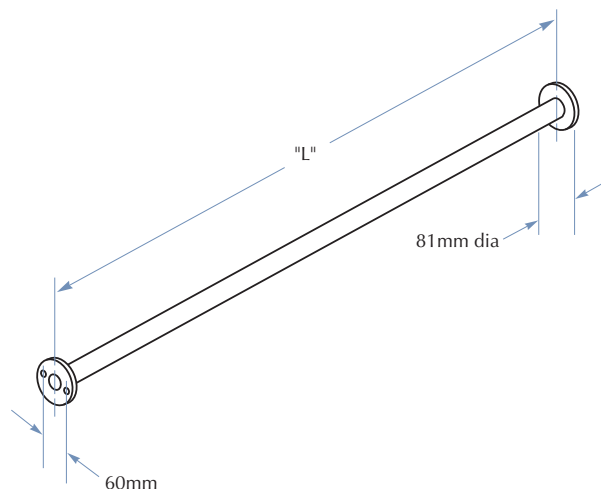

TOLL FREE 1300 364 561

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation.