



PRODUCT FEATURES:

- Modular - Easy to transport and install
- Satin finish stainless steel 25mm dia
- Surface Mounted
- Optional shower curtain available : Model 9537

Overall Dimensions:

1200mm x 1200mm x 600mm Ceiling Support

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 (18-8), 22 gauge stainless steel.

One piece drawn construction with exposed surfaces in architectural satin finish.

TUBING: Fabricated of type 304 (18-8), 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish.


ESCUTCHEONS: Fabricated of type 304 (18-8), 22 gauge stainless steel. One piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.





INSTALLATION:

To properly engage rod in support sleeves, rod length must be no less than approximately 6mm shorter than wall opening. Secure one flange to wall with mounting screws (included) at holes provided. Align mounting holes vertically. Slip opposite flange and both escutcheons into place. Secure flange to wall and snap escutcheons over mounting flanges.

GUIDE SPECIFICATION:

Concealed mounted shower rod shall be fabricated of type 304 (18-8), 18 gauge stainless steel in satin finish. Flanges shall be of 22 gauge stainless steel with snap-on vandal-resistant protective escutcheons.

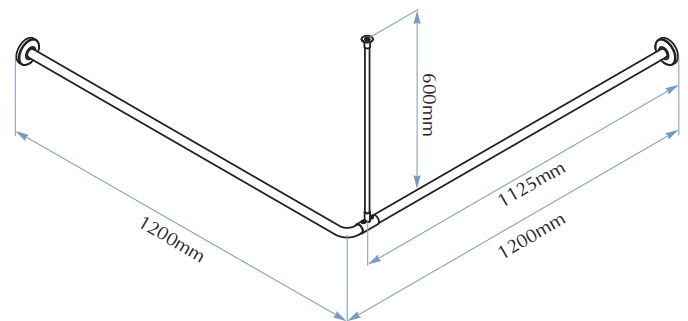

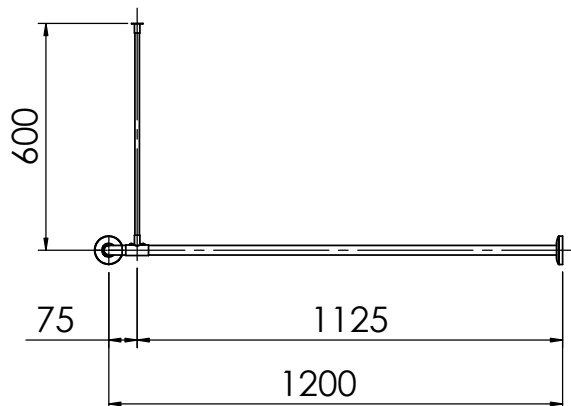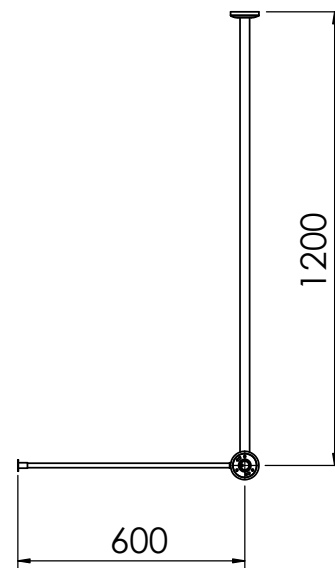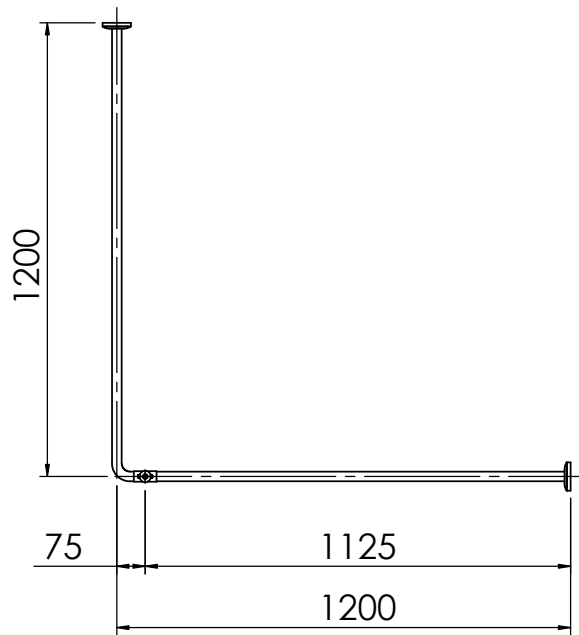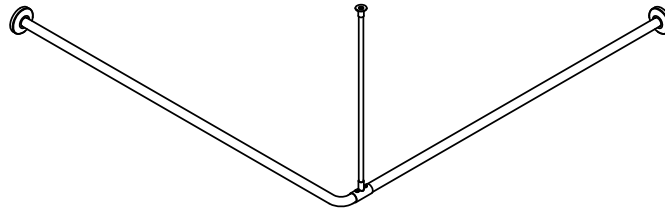

Bradley

DWG NO. 9538H-CNR

APPROVED BY:

Proudly customised design please approve

SCALE: 1:20