



PRODUCT FEATURES:

- Ergonomically designed white polyurethane, padded, water-proof cushion 40mm thick
 - 32mm diameter brushed brass stainless steel finish tubing
 - Concealed fixing
 - Easy to install on most building surfaces
 - AS 1428.1 compliant
- Overall Dimensions
560mm W centres with 360mm wide backrest

PRODUCT DATA:

CONSTRUCTION:

FLANGES: Fabricated of type 304 stainless steel.

ESCUTCHEONS: Fabricated of type 304 stainless steel.

One-piece drawn construction with exposed surfaces in architectural brushed brass finish. Snap over flanges to conceal mounting screws.

TUBING: Fabricated of type 304 stainless steel, seamless construction with exposed surfaces in architectural brushed brass finish. Bent ends of tubing pass through the flanges and are heliarc welded into a single structural unit for maximum strength. Intermediate supports are contour cut and joined by heliarc welding to form an integral part of the tubing. All welds ground and polished to blend. Mandrel bending process maintains uniform tubing diameter.

STRENGTH:


When properly mounted, all Bradley heavy duty systems meet or exceed the requirements of Australian Standard AS1428.1(2,3), of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS).






INSTALLATION:

Secure to wall where adequate in-wall backing exists. Use escutcheons as a template to locate mounting holes. Drill holes and set anchors as appropriate. Mount backrest and secure mounting screws. Snap escutcheons into place.

GUIDE SPECIFICATION:

Unit shall be fabricated of type 304 brushed brass stainless steel finish with concealed mounting flanges in sizes and configurations as indicated. Padded white polyurethane backrest.

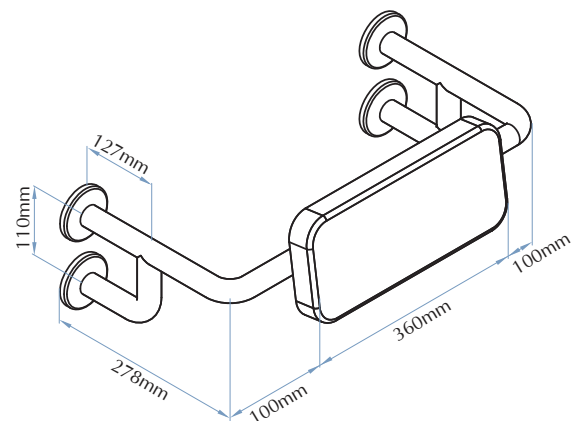

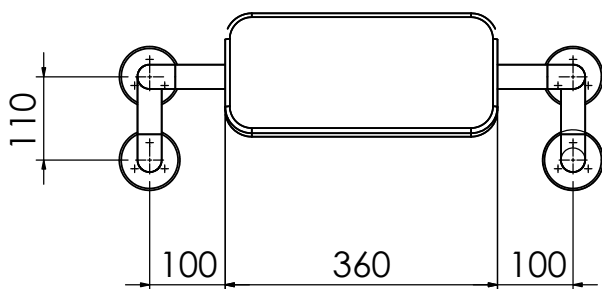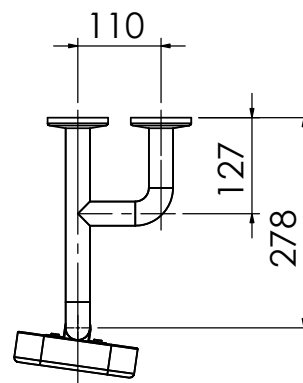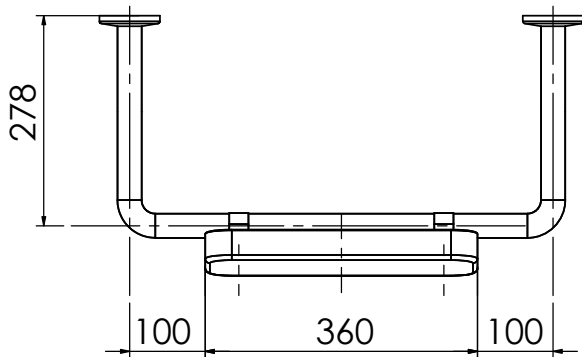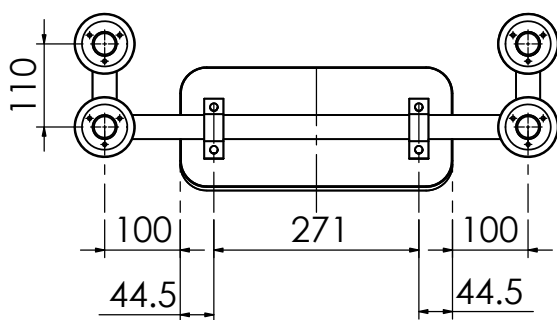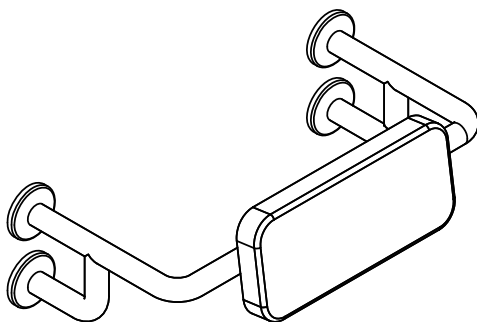

Bradley

DWG NO. 9575-BB

APPROVED BY:

Proudly customised design please approve

SCALE:1:10