



PRODUCT FEATURES:

- Stainless steel tubing
- Satin finish stainless steel
- Surface mounted
- Free of ligature points
- Seat surface area is 960mm to suit

accessible requirements

Overall dimensions:

1060mm W x 400mm H x 395mm D

PRODUCT DATA:

CONSTRUCTION:

FRAME: Fabricated of type 304 (18-8), 11 gauge satin finish stainless steel. All welded construction with burr free edges.

SIDES OF SEAT: Fabricated from 32mm diameter satin finish stainless steel tubing.

OPERATION:


Seat is prominent in an upright position and cannot be folded. When properly installed, seat can support up to 170kg static load.


INSTALLATION:

Provide concealed backing or anchors as specified by architect before finished wall is applied. It attaches to the wall using 12 x 12G x 50mm stainless steel security/torx head screws (not included). Mount the unit so the top of the seat is 470mm to 480mm above the finished floor.


GUIDE SPECIFICATION:

Anti-ligature shower seat shall be fabricated of 11 gauge satin finish 304 series stainless steel. The sides of the seat are fabricated from 32mm diameter satin-finish stainless steel tubing. With overall dimension of 1060mm W x 400mm H x 395mm D.

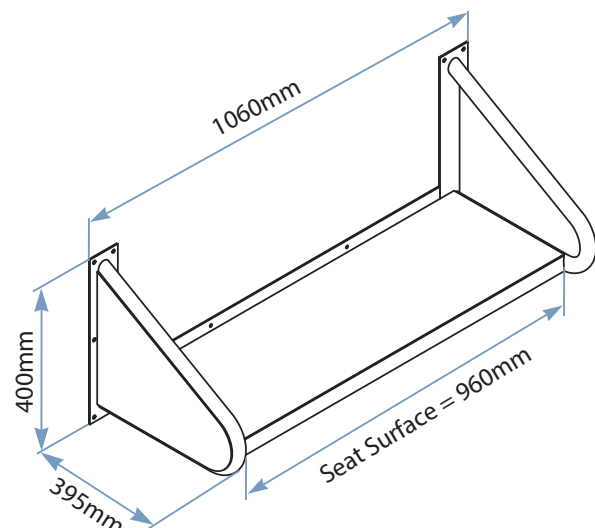


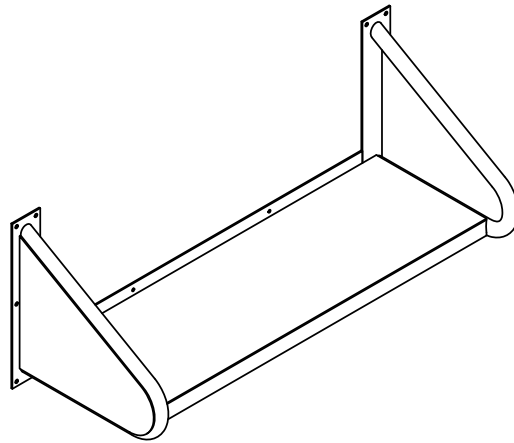


TOP VIEW

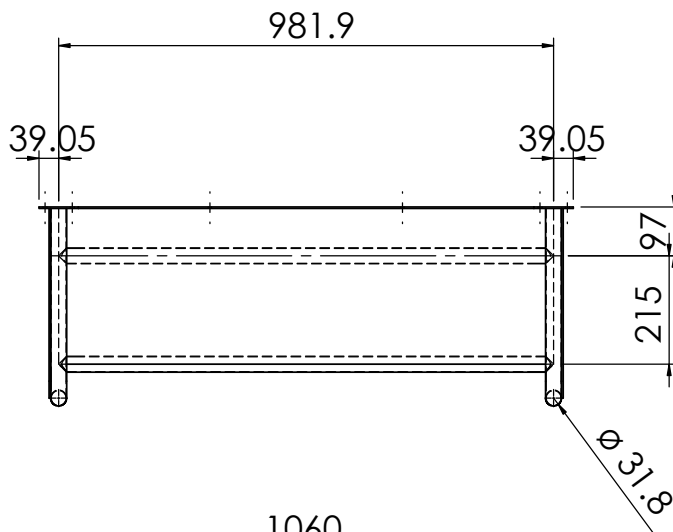

FRONT VIEW

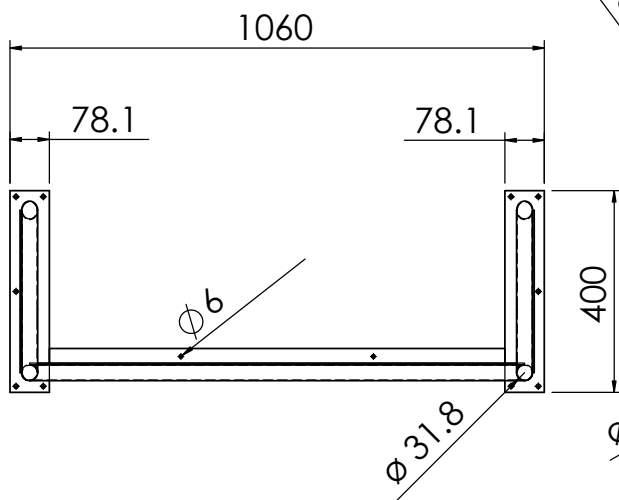

SIDE VIEW

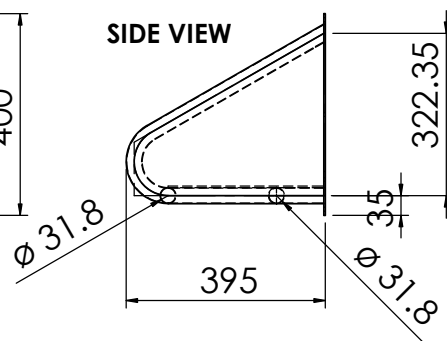

Bradley

DWG NO. SA96

APPROVED BY:

Proudly customised design please approve SCALE:1:15