

SURFACE MOUNTED STAINLESS STEEL FRAMED MIRROR



STAINLESS STEEL FRAMED MIRROR 782

- 20mm x 20mm welded satin finish stainless steel frame with welded corners and theft-resistant mounting
- Wall hanger of 18 gauge steel
- Solid web backing
- Mirror glass conforms to AS1288/2006 Australian safety glass standards

Overall Dimensions and for custom sizes: Specify "W" width and "H" height

CONSTRUCTION:

MIRROR: Fabricated of first quality 6.35mm glass, triple silver-plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. All edges protected by shock-absorbing, neoprene tubing.

Conforms to AS1288/2006 Australian safety glass standards.

FRAME: Fabricated of heavy gauge, one piece, roll formed stainless steel, 20mm x 20mm angle with corners heliarc welded, ground and polished smooth to a satin finish. Double strength continuous integral stiffener on all sides for added strength. Bevel on front of angle secures frame flush against mirror.

BACK: Fabricated of galvanized steel, secured to frame with concealed screws, equipped with integral horizontal hanging brackets.

WALL HANGER: Fabricated of 18 gauge cold rolled steel, all welded construction to form rigid template.

INSTALLATION:

Secure concealed mounting bracket to wall with screws (not included) at holes provided.

NOTE: Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

GUIDE SPECIFICATION:

Mirror shall be framed with heavy gauge, one piece, roll formed 20mm x 20mm stainless steel angle with double strength continuous integral stiffener. Welded corners shall be polished to a uniform satin finish. Mirror shall be of first quality 6.35mm glass and protected by a shock absorbing, neoprene tubing with Poly-Glaze protective finish. Back of unit shall be galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting.

MODEL 782

Options:

1.2mm Thick Frame

1.5mm Thick Frame

(Refer Below)


Options 1.2mm Thick Frame:

Model 782-2424	600mm x 600mm
Model 782-1830	450mm x 750mm
Model 782-1824	450mm x 600mm
Model 782-1624	400mm x 600mm

Options 1.5mm Thick Frame:

Model 782-2472	600mm x 1800mm*
Model 782-2460	600mm x 1500mm*
Model 782-2448	600mm x 1200mm*
Model 782-2440	600mm x 1000mm*
Model 782-2438	600mm x 950mm
Model 782-2430	600mm x 750mm
Model 782-2040	500mm x 1000mm*
Model 782-1872	450mm x 1800mm*
Model 782-1860	450mm x 1500mm*
Model 782-1840	450mm x 1000mm*
Model 782-1838	450mm x 950mm
Model 782-1836	450mm x 900mm

* These mirrors comply to AS1428.1

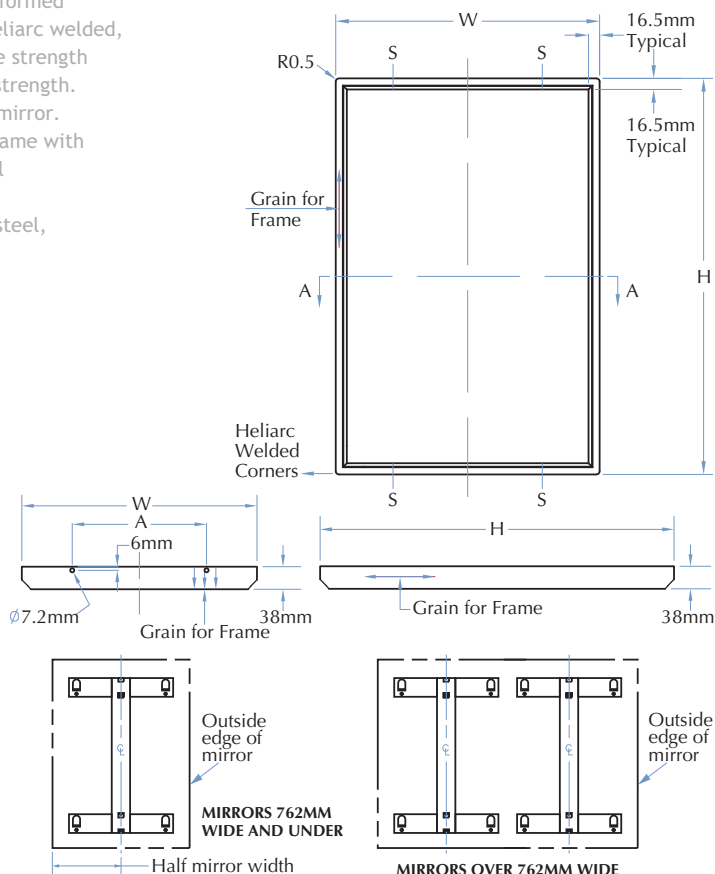

TOLL FREE 1300 364 561

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation.

Bradley
AUSTRALIA.COM